


### METALLIZED POLYESTER FILM CAPACITOR(TUBULAR)

#### 金屬化聚酯薄膜電容器(管狀型)

#### MET Series

##### •FEATURE 特點

- (1) Non-inductive construction
- (2) Self-healing
- (3) High property moisture resistance
- (4) High capacitance value available
- (1) 無感結構
- (2) 自癒特性
- (3) 耐高濕特性
- (4) 可達較高電容量

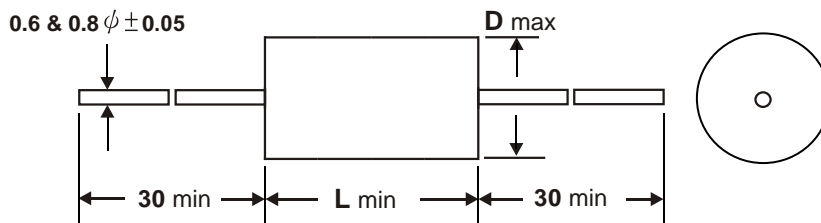

##### •SPECIFICATIONS 規格

Operating Temperature Range 操作溫度範圍	-40°C ~ +85°C
Rated Working Voltage 額定工作電壓	100V, 250V, 400V, 630V, 1000V (DC)
Rated Capacitance Range 電容值範圍	0.01 $\mu$ F ~ 30.0 $\mu$ F
Capacitance Tolerance 電容誤差值	J ( $\pm$ 5%), K ( $\pm$ 10%), M ( $\pm$ 20%)
Dielectric Strength 誘電強度	Withstand 150% of rated working voltage for 1 minute at 25 degree C.
Dissipation Factor (D.F.) 散逸因子	Less than 1.0% at 1KHz, 25°C
Insulation Resistance 絕緣電阻	15,000 M $\Omega$ min., for C $\leq$ 0.33 $\mu$ F 5,000 M $\Omega$ X $\mu$ F min., for C > 0.33 $\mu$ F

##### •DIMENSIONS 尺寸

(Unit: mm)

W.V.	100V DC		250V DC		400V DC		630V DC		1000V DC	
	D	L	D	L	D	L	D	L	D	L
0.01	5.0	10.5	5.5	14.0	5.5	14.0	6.0	14.0	8.0	19.0
0.015	5.0	10.5	5.5	14.0	5.5	14.0	6.5	14.0	8.0	19.0
0.022	5.0	10.5	5.5	14.0	5.5	14.0	6.5	14.0	9.0	19.0
0.033	5.0	10.5	5.5	14.0	6.0	14.0	6.5	19.0	10.0	19.0
0.047	5.0	10.5	5.5	14.0	7.0	14.0	7.5	19.0	10.5	25.0
0.068	5.0	10.5	5.5	14.0	6.5	19.0	8.5	19.0	11.5	25.0
0.1	5.5	10.5	6.0	14.0	7.5	19.0	9.0	25.0	12.0	32.0
0.15	6.5	10.5	6.5	14.0	8.5	19.0	10.5	25.0	14.0	32.0
0.22	6.0	14.0	7.0	19.0	10.0	19.0	12.0	25.0	16.0	32.0
0.33	7.0	14.0	8.0	19.0	10.0	25.0	12.0	32.0	17.0	47.0
0.47	8.0	14.0	9.0	19.0	11.5	25.0	14.0	32.0	19.0	47.0
0.68	8.0	19.0	9.0	25.0	13.0	32.0	16.5	32.0	22.0	47.0
1.0	9.0	19.0	10.5	25.0	15.0	32.0	20.0	32.0	26.0	47.0
1.5	10.0	25.0	12.0	32.0	18.0	32.0	19.0	47.0		
2.2	12.0	25.0	14.0	32.0	20.0	32.0	23.0	47.0		
3.3	14.0	25.0	16.5	32.0	20.0	47.0	27.0	47.0		
4.7	14.0	32.0	16.0	47.0	23.0	47.0	31.0	47.0		
6.8	16.5	32.0	18.5	47.0	26.0	47.0				
10.0	18.0	47.0	22.0	47.0						
15.0	21.0	47.0	26.0	47.0						
22.0	25.0	47.0	29.0	58.0						
27.0	27.0	47.0	32.0	58.0						
30.0	29.0	47.0	34.0	58.0						